

Date		Business Development, Microwave Division New Japan Radio Co., Ltd.
March 12, 2021		

Under Development

Approved:	Takeshi NISHIMURA
Checked:	Kenta KOBATA
Originator:	Yasuhide KAMADA

- Specification -

C-band PLL LNB

Internal & External Reference Model

Model No. NJS8496 series

Model No.	RF Frequency	Local Frequency	IF Frequency
NJS8496 series	3.4 to 4.2 GHz	5.15 GHz	950 to 1,750 MHz
NJS8497 series	3.625 to 4.2 GHz	5.15 GHz	950 to 1,525 MHz
NJS8498 series	4.5 to 4.8 GHz	5.76 GHz	960 to 1,260 MHz

Local Reference Type: Internal / External Reference

Local Stability: H-type, +/- 10 ppm (+/- 50 kHz typ.)
 S-type, +/- 3 ppm (+/- 15 kHz typ.)
 U-type, +/- 1 ppm (+/- 5 kHz typ.)
 V-type, +/- 0.3 ppm (+/- 1.5 kHz typ.)
 E-type, Same as External Reference Stability

RF Input Interface: Waveguide, CPR-229G

IF Output Interface: N-type / F-type, Female Connector

DC Power Input: IF Output Interface Connector

DC Power Voltage Range: +12 to +24 V

Copyright©

New Japan Radio Co., Ltd.

Microwave Division

-Notice of Proprietary Information-

This document and its contents are proprietary to New Japan Radio Co., Ltd.

This publication and its contents may not be reproduced or distributed for any other purpose
without the written permission of New Japan Radio Co., Ltd.

Those specifications listed in this document are subject to change at any time.

New Japan Radio Co., Ltd. Microwave Division	Title: Preliminary Specification of NJS8496 series		
	Reference No.: PRD-NJS8496	Rev.: 00-07E	Sheet: 1 / 11

Model Number

N J S 8 4 9 6 H F

IF Interface Connector

F: F-type (75 ohms), Female Connector

N: N-type (50 ohms), Female Connector

Local Stability Line-up

H: Internal Reference, Local Stability: +/- 10 ppm, H-type

S: Internal Reference, Local Stability: +/- 3 ppm, S-type

U: Internal Reference, Local Stability: +/- 1 ppm, U-type

V: Internal Reference, Local Stability: +/- 0.3 ppm, V-type

E: External Reference, E-type

RF Frequency

6: 3.4 to 4.2 GHz [Full C-band]

7: 3.625 to 4.2 GHz [Standard C-band]

8: 4.5 to 4.8 GHz [INSAT C-band]

Product Series Number

Reference & Local Stability Line-up

(H-type Model) Internal Reference, +/- 10 ppm Local Stability

(S-type Model) Internal Reference, +/- 3 ppm Local Stability

(U-type Model) Internal Reference, +/- 1 ppm Local Stability

(V-type Model) Internal Reference, +/- 0.3 ppm Local Stability

(E-type Model) External Reference

New Japan Radio Co., Ltd.
Microwave Division

Title:

Preliminary Specification of NJS8496 series

Reference No.:

PRD-NJS8496

Rev.:

00-07E

Sheet:

2

1. Electrical Specifications

#	Items	Specifications
1.1.	Absolute Maximum Rating [RF Input Power] [Supply Voltage]	-10 dBm for CW Signal +10 dBm for Peak of Pulse Signal +28 V DC
1.2.	Input RF Frequency Range <Model No. NJS8496> <Model No. NJS8497> <Model No. NJS8498>	3.4 to 4.2 GHz 3.625 to 4.2 GHz 4.5 to 4.8 GHz
1.3.	Noise Temperature @ +25 °C	15 K typ., 30 K max.
1.4.	Output IF Frequency Range <Model No. NJS8496> <Model No. NJS8497> <Model No. NJS8498>	950 to 1,750 MHz 950 to 1,525 MHz 960 to 1,260 MHz
1.5.	Conversion Gain @ +25 °C	59 dB min., 67 dB max.
1.6.	Conversion Gain Ripple @ +25 °C	2 dBp-p max. at any 50 MHz segments.
1.7.	Conversion Gain Flatness over Frequency <Model No. NJS8496> <Model No. NJS8497> <Model No. NJS8498>	5 dBp-p max. at 800 MHz BW 5 dBp-p max. at 575 MHz BW 4 dBp-p max. at 300 MHz BW
1.8.	Conversion Gain Stability over Temperature	5 dB max.
1.9.	Output Power @ 1dB G.C.P. (P1dB)	+3 dBm min.
1.10.	IM3 for two dBm input carriers < Condition > Input Level: -75 dBm for each carriers Separation Frequency: 10 MHz	-45 dBc max.
1.11.	Output Intercept Point	+13 dBm min.
1.12.	Local Oscillator Frequency <Model No. NJS8496> <Model No. NJS8497> <Model No. NJS8498>	5.15 GHz nom. 5.15 GHz nom. 5.76 GHz nom.
1.13.	Local Oscillator Stability including Temperature Stability of -40 to +60 °C, Initial Setting Error and Aging Error <H-type Model> <S-type Model> <U-type Model> <V-type Model> <E-type Model>	+/- 10 ppm max. +/- 3 ppm max. +/- 1 ppm max. +/- 0.3 ppm max. Depend on External Reference

New Japan Radio Co., Ltd.
Microwave Division

Title:

Preliminary Specification of NJS8496 series

Reference No.:

PRD-NJS8496

Rev.:

00-07E

Sheet:

3

#	Items	Specifications
1.14.	L.O. Phase Noise (SSB)	-70 dBc/Hz typ., -59 dBc/Hz max. @ 100 Hz -80 dBc/Hz typ., -75 dBc/Hz max. @ 1 kHz -90 dBc/Hz typ., -85 dBc/Hz max. @ 10 kHz -100 dBc/Hz typ., -95 dBc/Hz max. @ 100 kHz -110 dBc/Hz typ., -105 dBc/Hz max. @ 1 MHz
1.15.	Requirement for External Reference (Only E-type Model Specified)	
	[Input Port]	IF Output Interface *Combine reference with IF Signal and DC Power
	[Frequency]	10 MHz (sine-wave)
	[Input Power]	-10 to 0 dBm @IF Output connector
	[Phase Noise]	-135 dBc/Hz max. at 100 Hz -143 dBc/Hz max. at 1 kHz -145 dBc/Hz max. at 10 kHz
1.16.	Spurious	a) -140 dBm max. at input, Fixed frequency spur, unrelated to test CW signal. (Measured at specified IF band: 950 to 1,750 MHz, 950 to 1,525 MHz, or 960 to 1,260 MHz) b) -55 dBc max. with test CW signal -10 dBm IF output (Measured at specified IF band: 950 to 1,750 MHz, 950 to 1,525 MHz, or 960 to 1,260 MHz)
1.17.	Image Rejection	60 dB min.
1.18.	Input V.S.W.R.	2.5 : 1 typ.
1.19.	Output V.S.W.R.	2.0 : 1 max.
1.20.	DC Power Requirement	
	[Input Port]	IF Output Interface
	[Input Voltage]	+12 to +24 VDC
	[Current Drain]	350 mA

2. Mechanical Specifications

#	Items	Specifications
2.1.	RF Input Interface	Waveguide, CPR-229G (with Grooved) and equivalent Waveguide Flange: Type of Through hole ($\phi 6.5$ nom.)
2.2.	IF Output Interface Connector	
	<F-type Model>	F-type female connector, 75 ohms
	<N-type Model>	N-type female connector, 50 ohms
2.3.	Dimension & Housing	144.5 (L) × 98.4 (W) × 69.9 (H) mm without interface connectors and screws
2.4.	Weight	670 g

3. Environmental Specifications

#	Items	Specifications
3.1.	Temperature Range (ambient)	
	[Operating]	-40 to +60 °C
	[Storage]	-40 to +80 °C
3.2.	Humidity	0 to 100 % RH
3.3.	Altitude	15,000 feet (4,572 m)
3.4.	Vibration	5 G [49.03 m/s ²] (3 axis, 50 Hz to 2 kHz) 1 mm p-p (3 axis, 5 to 50 Hz)
3.5.	Shock	30 G [294.20 m/s ²] (3 axis)
3.6.	Waterproof / Dustproof (IP Code)	IP 67
3.7.	Corrosion	Salt spray tests NaCl 5% @ +35°C, 96 hours Test Method: JIS Z 2371
3.8.	Regulations	EU Directive (CE Marking) RE - 2014/53/EU EMC - 2014/30/EU RoHS - 2011/65/EU + (EU)2015/863 Safety: EN62368-1, EN60950-22

New Japan Radio Co., Ltd.
Microwave Division

Title:

Preliminary Specification of NJS8496 series

Reference No.:

PRD-NJS8496

Rev.:


00-07E

Sheet:

5

4. Outline Drawing

4.1. N-type Model

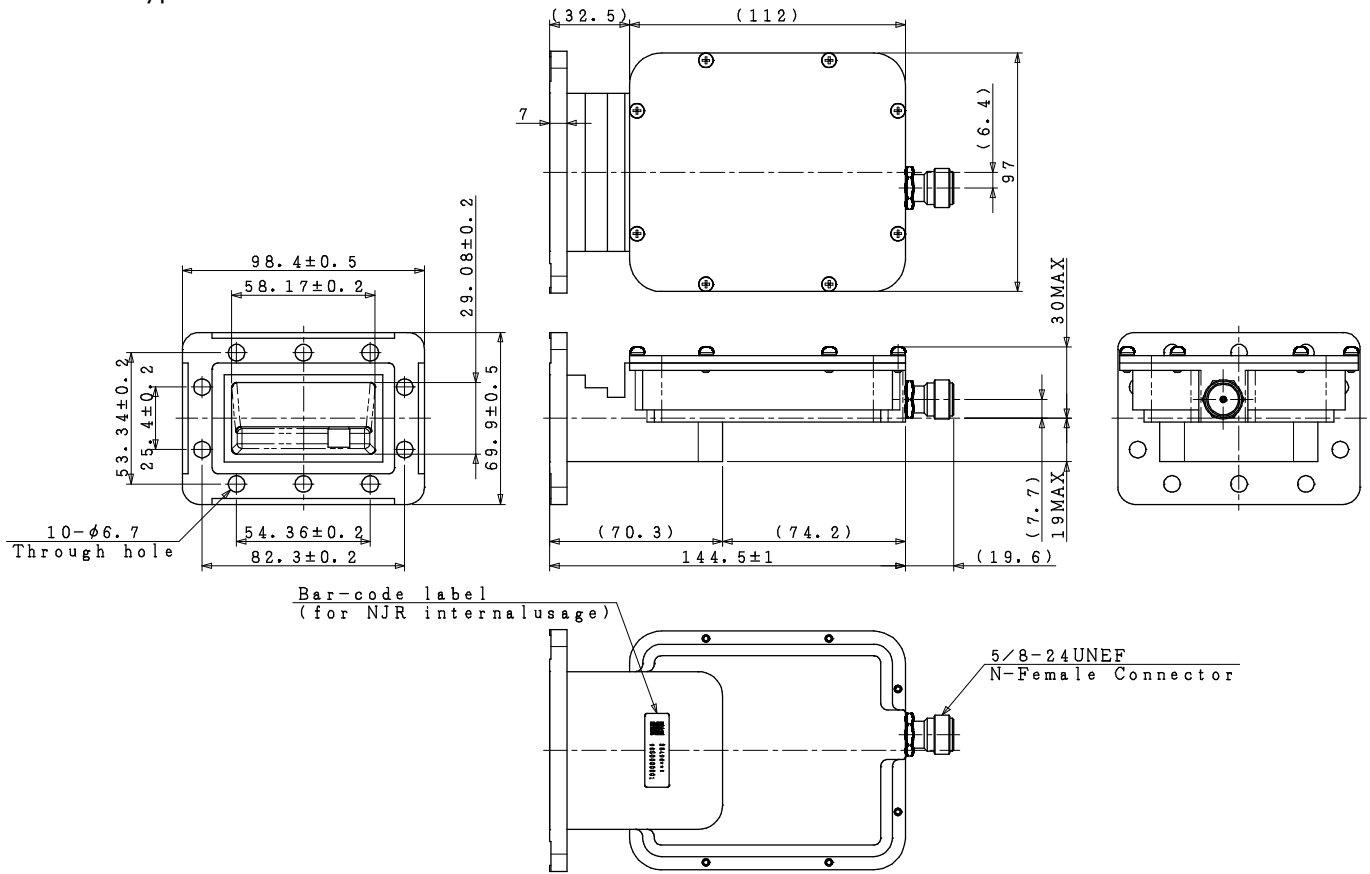

New Japan Radio Co., Ltd.
Microwave Division

Title:

Preliminary Specification of NJS8496 series

Reference No.:

PRD-NJS8496

Rev.:


00-07E

Sheet:

6


5. Label

5.1. Label Outline (e.g. NJS8496H)

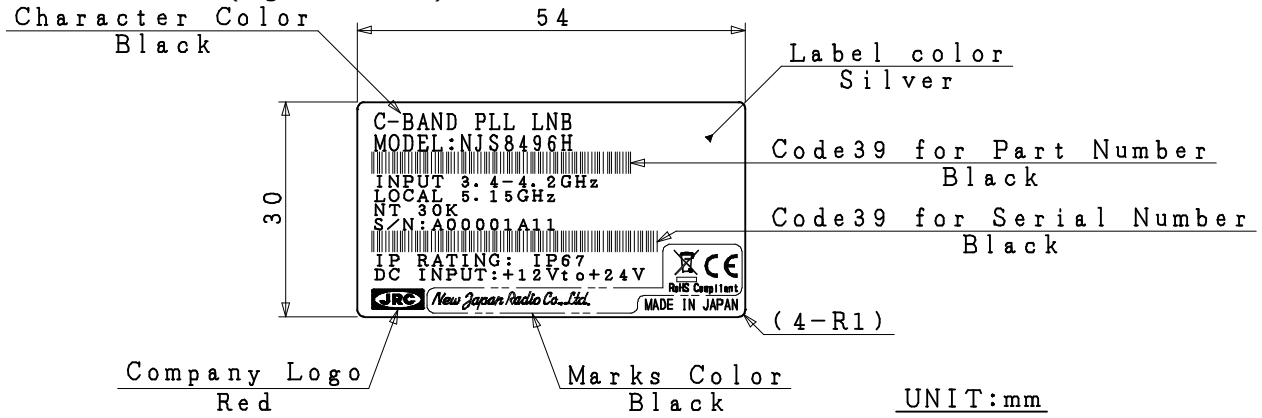

5.2. Definitions

Serial Number (OSSSSRYM) - ALPHANUMERIC (9 characters)

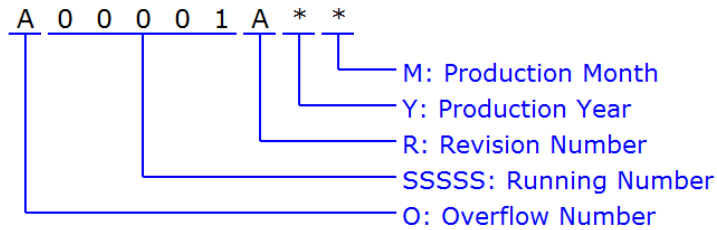

O: Overflow Number - ALPHABET (1 character)

"A" to "Z", e.g.: A99999 ⇒ B00001

SSSS: Running Number - NUMBER (5 digits)

"00001" to "99999"

R: Revision Number - ALPHABET (1 character)

"A" to "Z"

Y: Production Year - NUMBER (1 digit)

Calendar Number, e.g.: 2009:9, 2010:0, 2011:1, 2012:2 ····

M: Production Month - ALPHANUMERIC (1 character)

"1" to "9", "X" as October, "Y" as November, "Z" as December

New Japan Radio Co., Ltd.
Microwave Division

Title:

Preliminary Specification of NJS8496 series

Reference No.:

PRD-NJS8496

Rev.:

00-07E


Sheet:

7

6. Package

6.1. Individual Package

- ①: C-Band PLL LNB
- ②: Single wall corrugated fiberboard
 - Individual packaging box
- ③: Single wall corrugated fiberboard
 - Cushioning material
- ④: Accessories
 - O-RING (FULL)
- ⑤: Accessories
 - Cross recessed hex upset screws
M6×25 10 Pieces (SUS, SW and W) for Waveguide Flange Holes
 - Hexagon nuts
M6 Type 10 Pieces (SUS) for Waveguide Flange Holes

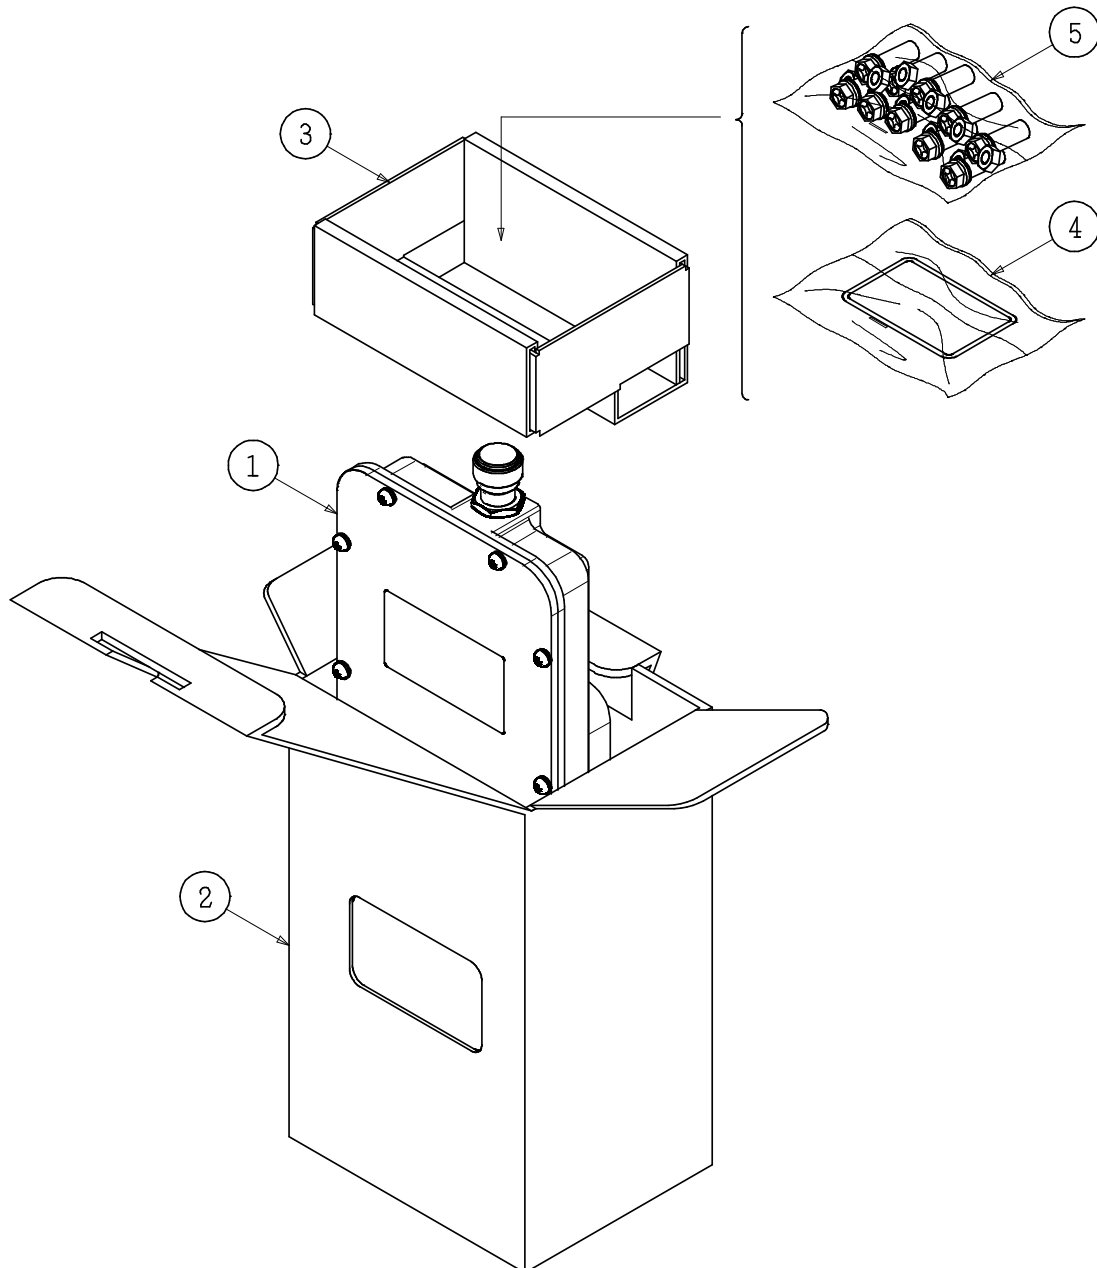

New Japan Radio Co., Ltd.
Microwave Division


Title:
Preliminary Specification of NJS8496 series

Reference No.:
PRD-NJS8496

Rev.:
00-07E


Sheet:
8

6.2. Shipping Package

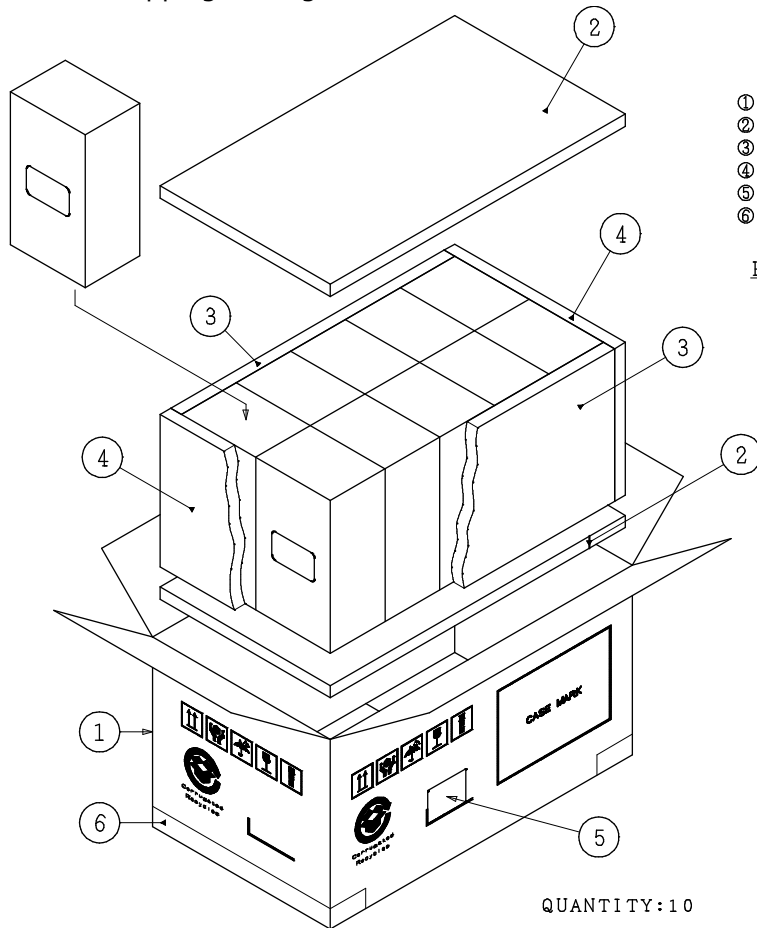


- ①: Double Wall Corrugated Fiberboard
- ②: Polyethylene Foam For Package Cushioning
- ③: Polyethylene Foam For Package Cushioning
- ④: Polyethylene Foam For Package Cushioning
- ⑤: Package Label
- ⑥: Carton Tape

Package Label

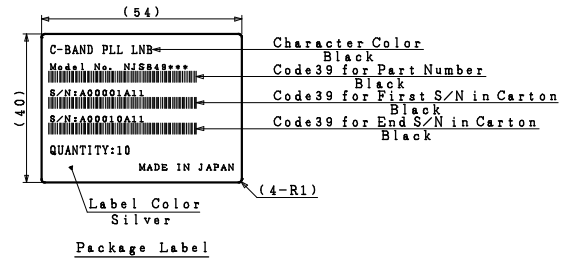

Pictorial Marking for Handling of Goods

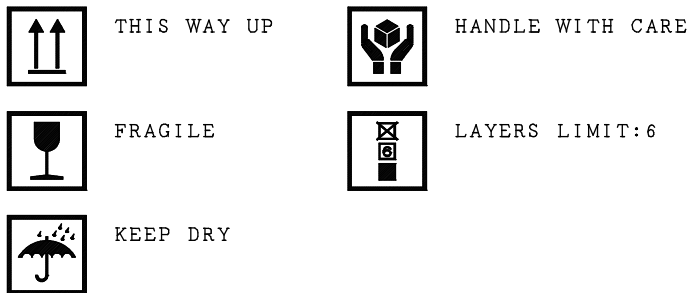

New Japan Radio Co., Ltd.
Microwave Division

Title:
Preliminary Specification of NJS8496 series

Reference No.:
PRD-NJS8496

Rev.:
00-07E

Sheet:
9

6.3. Enclosed Accessories

- O-ring Gasket, Qty (1), Full-type, for Waveguide Flange
- Bolts, Qty (10), M6 x 25, Cross Recessed Hexagon Head with Spring Washer and Flat Washer, SUS
- Nuts, Qty (10), M6, Hexagon Nuts, SUS

New Japan Radio Co., Ltd.
Microwave Division

Title:
Preliminary Specification of NJS8496 series

Reference No.:
PRD-NJS8496

Rev.:
00-07E

Sheet:
10



Caution

1. While New Japan Radio., Ltd.(NJR) continually strives to improve the quality and reliability of any products, failures would occur in microwave products over time. For this reason, it is important that customers fulfill their responsibilities to ensure designed-in safety – including failsafe functions, redundancy, and measures to prevent malfunctions and the spread of fire – in order to avoid injuries, accidents, or social repercussions resulting from the failure of any product related to satellite communications on this document (hereinafter, “the product”). Customers must pay careful attention to ensuring the safety of their equipment.
2. The product is designed and tested to function in accordance with its specifications. Do not use under conditions that deviate from the product specifications included in the specifications. NJR assumes no responsibility and shall not be liable for any injuries, accidents, or social repercussions resulting from the product being in a poor or damaged state because it was used under conditions that depart from the specifications.
3. The product is covered by a warranty for one year following delivery unless otherwise stipulated in the contract or delivery conditions. In the event of a failure for which NJR are responsible occurring during the warranty period, NJR undertake to repair or replace the product free of charge. Note, however, that the warranty does not cover failures such as those listed here (see bullets below), even if they occur within the warranty period. In addition, in the case of a product being repaired or replaced by us, the starting date for the warranty period is still the original delivery date of the product.
 - Failure due to the product being used in conditions other than those stipulated in the data sheet, specification sheet, etc.
 - Failure due to modifications or repairs carried out by some entity other than our company
 - Failure determined to be the result of unsuitable maintenance or replacement of a consumable item that requires due maintenance
 - Failure due to circumstances that were unforeseeable given the scientific/technological standards at the time of shipment
 - Other failures due to external factors such as fire, earthquake, flood and power supply anomalies for which NJR are not responsible

In addition, the product warranty is limited to the provision of repair services or replacement at no cost. It does not cover secondary damage (to equipment, business opportunities, profits, etc.) or any other damage that may have resulted from failure of the product.
4. The product must be handled appropriately to ensure its continued reliability. Since it can be damaged by the intrusion of water, dust, oil, chemicals, etc., it must be given appropriate protection. Even in the case of a product with an airtight construction, avoid using it in an environment that exceeds the stated levels of waterproofing/dustproofing. Also, be sure to use connectors and waveguides properly.

If replacement parts such as fans are included, proper maintenance is necessary. To maintain product performance and functionality, it is necessary to conduct inspections and maintenance at appropriate intervals and exchange replacement parts when necessary. Improper inspections or maintenance may result in failure.

In addition, the warranty does not cover the use of the product in areas where salt damage can be expected or where there is a substantial presence of corrosive gases such as Cl₂, H₂S, SO₂, and NO₂. If the product is to be used in such areas, at the time of installation you must take appropriate steps to protect the product.
5. If the product is to be used with equipment/systems that must meet special quality and reliability standards (aerospace equipment, medical equipment, power generation control equipment, automotive/railway transportation equipment, safety equipment, disaster prevention and security equipment, etc.), please consult with our sales staff in advance.
6. This product contains gallium arsenide (GaAs), classified as a harmful substance. To avoid danger, do not incinerate, crush, or chemically treat the product in such a way that gases or dust are released. When disposing of the product, comply with all applicable laws and regulations and do not treat it as general industrial waste or household waste.
7. When exporting a product or technology, observe export laws and regulations such as those governing foreign exchange and foreign trade, and obtain any necessary licenses for export, service transactions, etc. NJR request that you do not use our products or the technical data published on this document for developing weapons of mass destruction or for any other military purposes or applications.
8. The product specifications in this document are subject to change without notice. If you are considering using a product, delivery specifications must first be settled.

New Japan Radio Co., Ltd.
Microwave Division

Title:

Preliminary Specification of NJS8496 series

Reference No.:

PRD-NJS8496

Rev.:

00-07E

Sheet:

11