


TEMPERATURE COMPENSATED CRYSTAL OSCILLATOR	(SMD TYPE)	AXC-5032T
Surface Mount Type Temperature Compensated Crystal Oscillator		


SPECIFICATIONS

Type No.	AXC-5032T	
Frequency Range	10 ~ 50.000 MHz	
Output	CMOS	Clipped Sine
Frequency Stability vs Temp.	$\pm 0.1 \sim \pm 2.5 (-10 \sim +70^{\circ}\text{C}), \pm 0.2 \sim \pm 2.5 (-40 \sim +85^{\circ}\text{C})$ ppm	
Frequency Stability vs Supply Voltage	$\pm 0.2 \text{max.} (10 \sim 25\text{MHz})$ $\pm 0.3 \text{max.} (25 \sim 50\text{MHz})$	$\pm 0.1 \text{max.}$ ppm
Frequency Stability vs Load	$\pm 0.1 \text{max.} (10 \sim 25\text{MHz})$ $\pm 0.2 \text{max.} (25 \sim 50\text{MHz})$ ppm	
Frequency Stability vs Aging	$\pm 1.0 \text{max.}$ ppm	
Supply Voltage	2.7 ~ 5.5 V	
Supply Current	5.5max.	3.5 max. mA
Output Level	CMOS	0.8Vp-p min.
Symmetry	40/60 %	
Load	15pF	10k Ω //10pF
Operating Temperature	-10 ~ +70, -40 ~ +85 $^{\circ}\text{C}$	
Storage Temperature	-40 ~ +85 $^{\circ}\text{C}$	

CASE DIMENSIONS (Unit:mm)

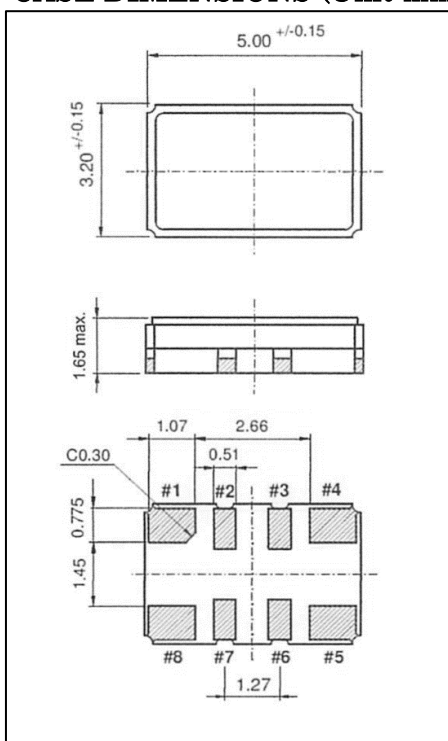

RECOMMENDED PADS

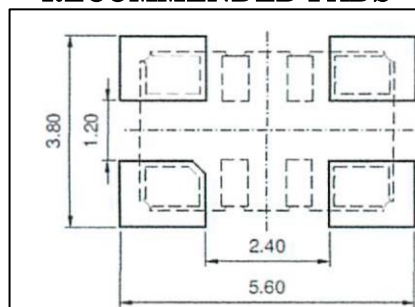

PIN CONNECTIONS

Pin#1	NC	Pin#5	Output
Pin#2	NC	Pin#6	NC
Pin#3	NC	Pin#7	NC
Pin#4	GND	Pin#8	V _{DD}